

SAILUN TERRAMAX A/T

Premium All Terrain Tire

M+S rated

All Terrain Tread Design

- advanced pattern for adverse driving conditions while delivering smooth ride

Aggressive block pattern design provide strong traction

- three center ribs with cross slots combine with four wide circumferential grooves
- helps channel away water and slush
- continuous road contact during wet highway driving




Special Tread Compound

- compound characteristics provide excellent performance in both highway and off-road driving conditions
- designed for improved ride comfort and quiet ride

Variable Groove Width

- optimized design in tread void area harmonizing channel width and tread block edge angle for improved uniform wear

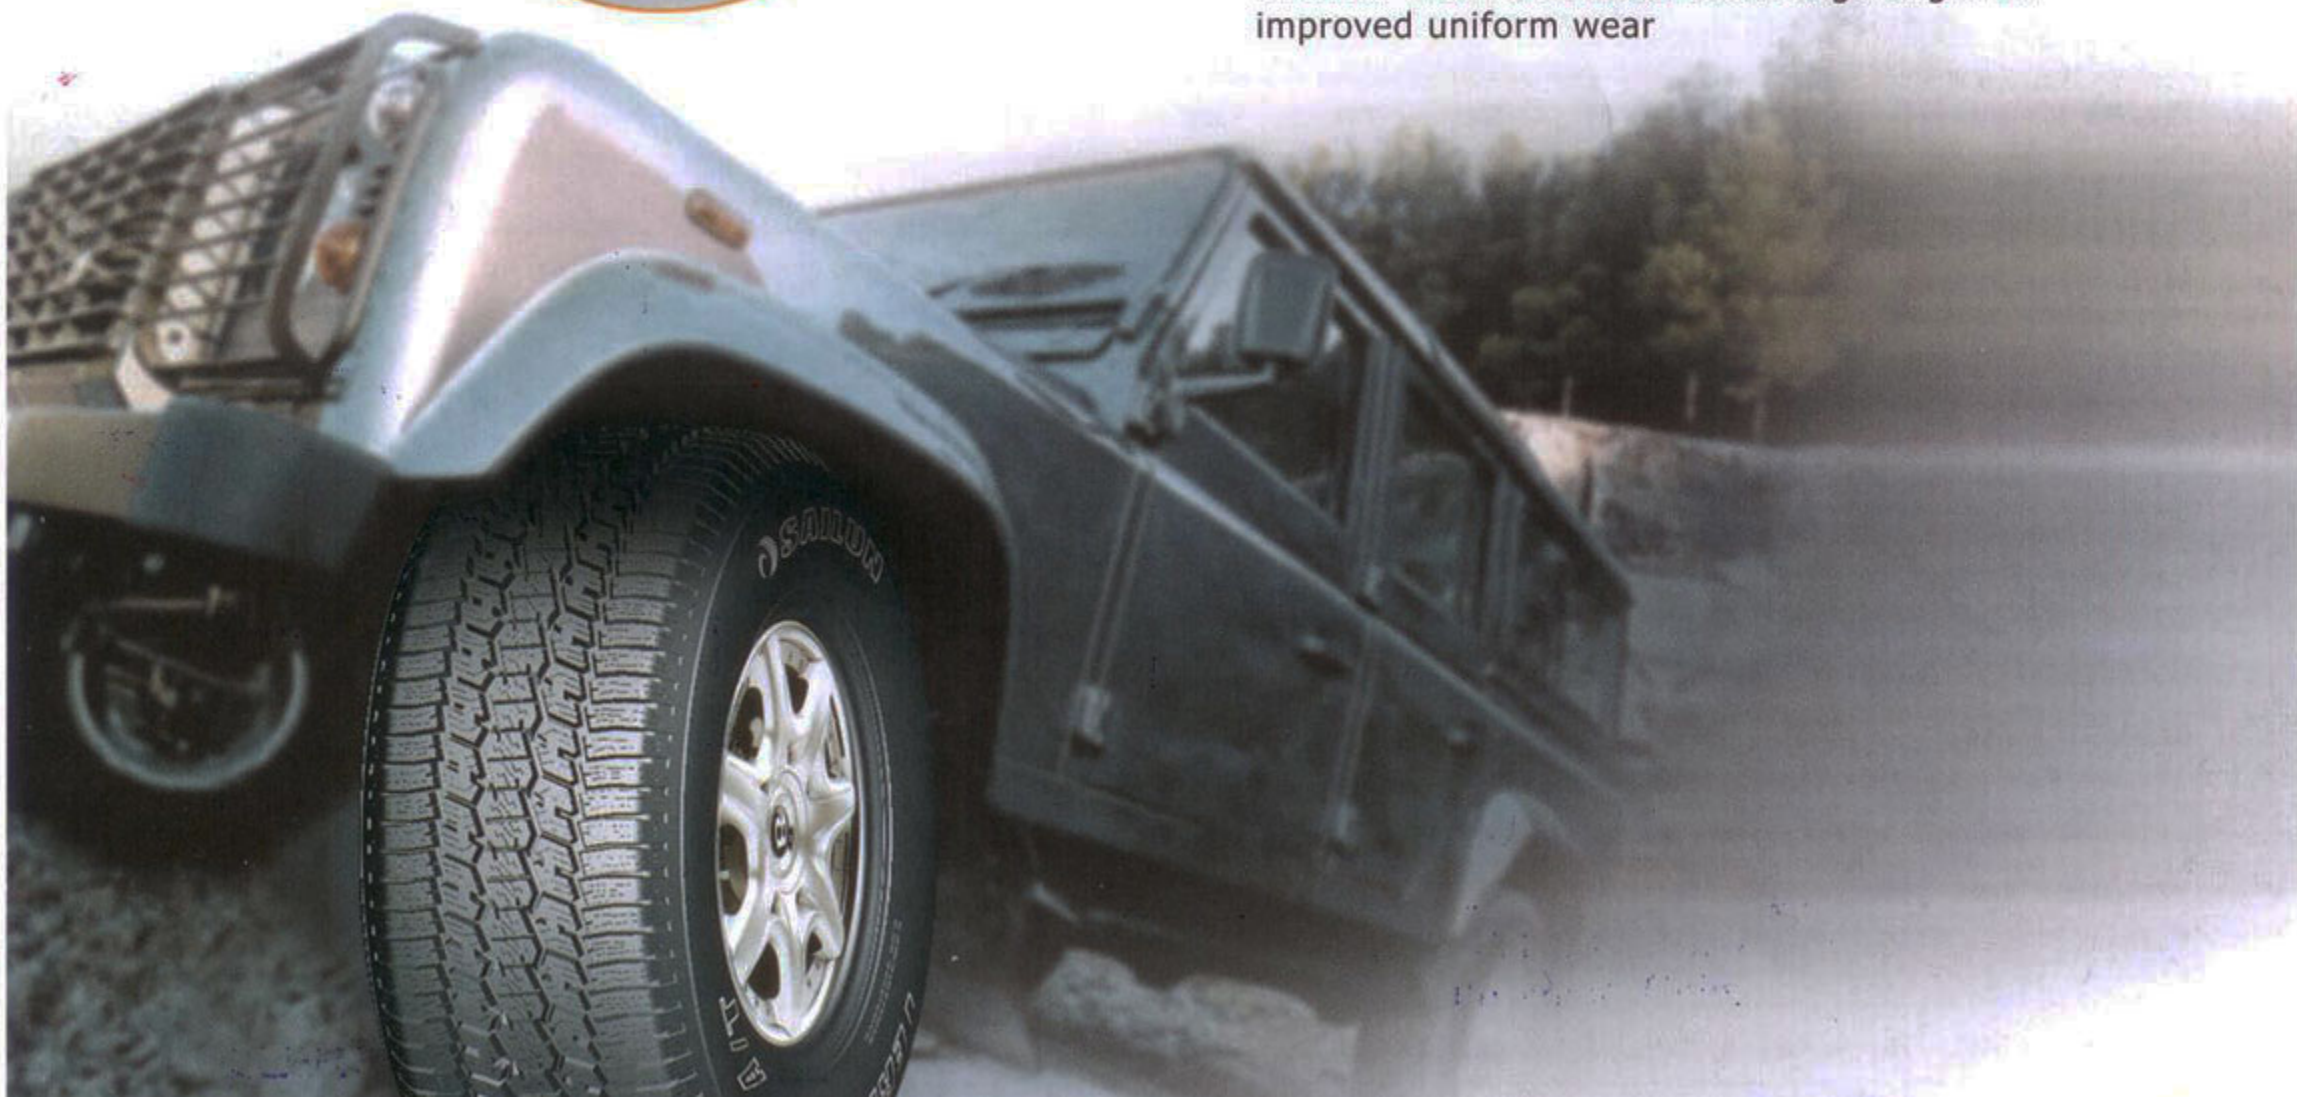



TERRAMAX A/T

LIGHT TRUCK AND SUV TIRE



Size	Side Wall	Ply Rating	Load Index	Speed Rating	Load Range	Section Width (mm/in)	Overall Diameter	Max Load (LBS.)	APPRVD. Rim Width (INS.)	MEAS. Rim Width (INS.)	UTQG			Tread Depth 32nd nch
											Treadwear	Traction	Temp	
235/75R15	OWL	-	105	T		235	733	2039	6J, 6 1/2J, 7J, 7 1/2J, 8J	6.5	460	A	B	14
235/70R16	OWL	-	106	T		240	736	2094	6J, 6 1/2J, 7J, 7 1/2J, 8J	7.0	460	A	B	14
245/70R16	OWL	-	107	T		248	750	2149	6 1/2J, 7J, 7 1/2J, 8J	7.0	460	A	B	13
255/70R16	OWL	-	111	T		260	764	2403	6 1/2J, 7J, 7 1/2J, 8J, 8J 1/2	7.5	460	A	B	14
265/70R16	OWL	-	112	T		272	778	2469	7J, 7 1/2J, 8J, 8 1/2J, 9J	8.0	460	A	B	14
265/70R17	OWL	-	115	T		272	804	2679	7J, 7 1/2J, 8J, 8 1/2J, 9J	8.0	460	A	B	14
245/65R17	OWL	-	107	T		248	750	2149	7J, 7 1/2J, 8J, 8 1/2J	7.0	460	A	B	13
LT215/85R16	BLK		115/111	R	E	216	772	2680/2470	5 1/2K, 5 1/2J, 5.50F, 6J, 6K, 6 1/2J, 6 1/2L, 7J, 7K, 7L	6.0	-	-	-	16
LT235/85R16	BLK		120/116	R	E	235	806	3042/2778	6J, 6K, 6L, 6 1/2J, 6 1/2L, 7J, 7K, 7L, 7 1/2J	6.5	-	-	-	16
LT225/75R16	BLK		115/112	S	E	223	744	2680/2470	6K, 6 1/2K, 6 1/2L, 7K, 7L, 6J, 6 1/2J, 7J	6.0	-	-	-	16
LT245/75R16	OWL		120/116	S	E	248	774	3042/2778	6 1/2K, 6 1/2L, 6 1/2J, 7J, 7K, 7L, 7 1/2J, 8J	7.0	-	-	-	16
LT265/75R16	OWL		112/109	S	C	267	804	2470/2270	7K, 7L, 8L, 7J, 7 1/2J, 8J	7.5	-	-	-	16
LT265/75R16	OWL		123/120	S	E	267	804	3415/3085	7K, 7L, 8L, 7J, 7 1/2J, 8J	7.5	-	-	-	16
LT265/70R17	OWL		121/118	S	E	272	804	3195/2910	7J, 7 1/2J, 8J, 8 1/2J	8.0	-	-	-	16
31x10.50R15	OWL		109	R	C	268	775	2270	7J, 7 1/2J, 8J, 8 1/2J, 9J	8.5	-	-	-	16
265/75R15	OWL	-	112	T		267	779	1120	7J, 7 1/2J, 8J, 8 1/2J, 9J	7.5	460	A	B	14
235/70R15	OWL	-	102	T		240	711	1896	6J, 6 1/2J, 7J, 7 1/2J, 8J	7.0	461	A	B	12
225/75R16	OWL	-	104	T		223	744	1984	6J, 6 1/2J, 7J, 7 1/2J	6.0	462	A	B	13
235/75R16	OWL	-	106	T		235	758	2094	6J, 6 1/2J, 7J, 7 1/2J, 8J	6.5	463	A	B	14
245/75R16	OWL	-	109	T		248	774	2271	6 1/2J, 7J, 7 1/2J, 8J	7.0	464	A	B	14
265/75R16	OWL	-	114	T		267	804	2601	7J, 7 1/2J, 8J, 8 1/2J, 9J	7.5	465	A	B	14
225/70R16	OWL	-	102	T		228	722	1929	6J, 6 1/2J, 7J, 7 1/2J	6.5	466	A	B	13
245/70R17	OWL	-	110	T		248	776	2337	6 1/2J, 7J, 7 1/2J, 8J	7.0	467	A	B	14
265/65R17	OWL	-	112	T		272	776	2469	7J, 7 1/2J, 8J, 8 1/2J, 9J, 9 1/2J	8.0	460	A	B	14
LT235/75R15	OWL	6	104/101	R	C	235	733	1985/1820	6J, 6 1/2J, 7J	6.5	-	-	-	16
LT285/75R16	OWL	10	126/123	S	E	286	834	3750/3415	7 1/2J, 8L, 8LB, 8KB, 8J, 8 1/2J, 9J	8.0	-	-	-	17
LT285/70R17	OWL	10	126/123	S	E	292	832	3750/3415	7 1/2J, 8J, 8 1/2J, 9J	8.5	-	-	-	17
30x9.50R15	OWL	6	104	R	C	240	750	1985	6 1/2J, 7J, 7 1/2J, 8J, 8J 1/2	7.5	-	-	-	16