


S606



Size	Load Range	Load Index	Tread Depth		Max Speed (mile/h)	Speed Rate	Static Load Radius	Overall Diameter		Overall Width		Meas RIM	Min Dual Spacing		Single Max i.p.		Dual Max i.p.		Max load (single/dual)		Pss Per Mile
			X/32	mm				ins.	mm	ins.	mm		ins.	mm	psi	kpa	psi	kpa	lbs	kg	
11R22.5	16PR/H	148/145	22	17.5	80	M	492	41.57	1056	10.94	278	8.25	12.52	318	123	850	123	850	6940/6390	3150/2900	318
12R22.5	16PR/H	152/148	22	17.5	80	M	507	41.95	1091	12.09	307	9.00	13.50	343	123	850	123	850	7830/6940	3550/3150	501
295/80R22.5	16PR/H	152/148	22	17.5	80	M	492	41.57	1056	11.65	296	9.00	13.19	335	123	850	110	850	7830/6940	3550/3150	516

Structure

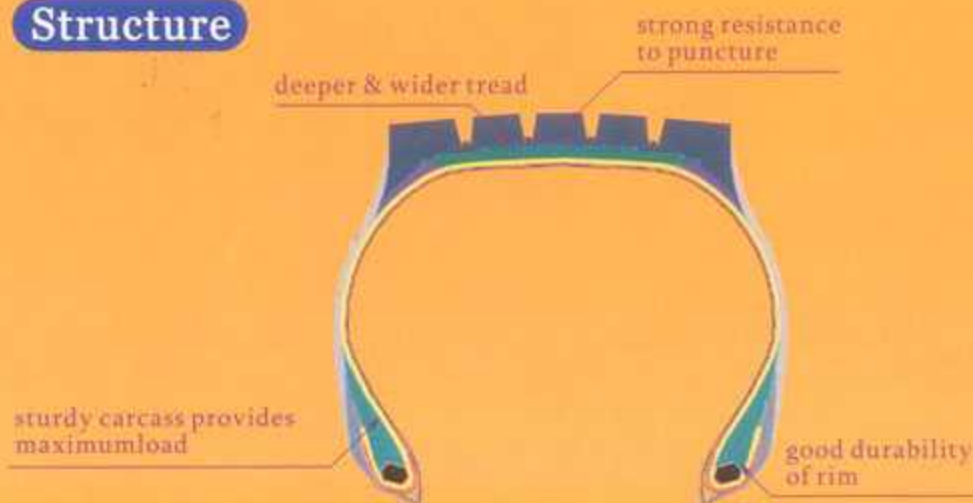

- Premium regional rib pattern for use in both steer and trailer applications.
- Suitable for demanding regional pick up and delivery vehicles.
- Deeper tread depth helps to promote longer wear (22/32"/17.5mm).
- Siping designed for improved heat dissipation and better traction in wet conditions.