


S607



| Size | Load Range | Load Index | Tread Depth | | Max Speed (mile/h) | Speed Rate | Static Loadlead Radius | | Overall Diameter | | Overall width | | Meas RIM | Min dual Spacing | | Single Max i.p. | | Dual Max i.p. | | Max load (single/dual) | | Revs Per Mile |
|-------------|------------|------------|-------------|------|--------------------|------------|------------------------|-----|------------------|------|---------------|-----|----------|------------------|-----|-----------------|-----|---------------|-----|------------------------|-----------|---------------|
| | | | X/32 | mm | | | ins. | mm | ins. | mm | ins. | mm | | ins. | mm | psi | kpa | psi | kpa | lbs | kg | |
| 315/80R22.5 | 16PR/H | 154/150 | 19 | 15.5 | 80 | M | 19.79 | 503 | 42.60 | 1082 | 12.09 | 307 | 9.00 | 13.82 | 351 | 120 | 825 | 120 | 825 | 8270/7385 | 3750/3350 | 488 |
| 295/80R22.5 | 16PR/H | 152/148 | 19 | 15.0 | 80 | M | 19.27 | 490 | 41.38 | 1051 | 11.65 | 296 | 9.00 | 13.19 | 335 | 123 | 850 | 123 | 850 | 7830/6940 | 3550/3150 | 502 |
| 315/80R22.5 | 18PR/J | 156/150 | 19 | 15.5 | 75 | L | 19.79 | 503 | 42.60 | 1082 | 12.09 | 307 | 9.00 | 13.82 | 351 | 123 | 850 | 123 | 850 | 8820/7385 | 4000/3350 | 488 |

Structure

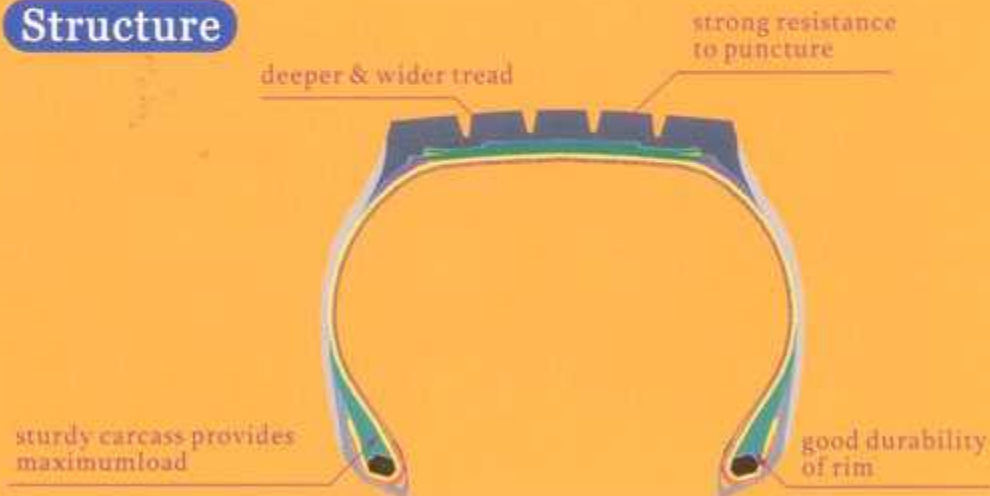

- Premium regional rib for use in both steer and trailer applications.
- Suitable for demanding regional pick up and delivery vehicles.
- Siping designed to give good heat dissipation and better traction in wet conditions.