



# S622



Size	Load Range	Load Index	Tread Depth		Max Speed (mile/h)	Speed Rate	Static Loadead Radius		Overall Diameter		Overall Width		Meas RIM	Min Dual Spacing		Single Max i.p.		Dual Max i.p.		Max load (single/dual)		Revs Per Mile
			X/32	mm			ins.	mm	ins.	mm	ins.	mm		ins.	mm	psi	kpa	psi	kpa	lbs	kg	
11R22.5	16PR/H	148/145	14	11.5	75	L	19.24	489	41.30	1049	10.94	278	8.25	12.52	318	123	850	123	850	6940/6390	3150/2900	503

## Structure

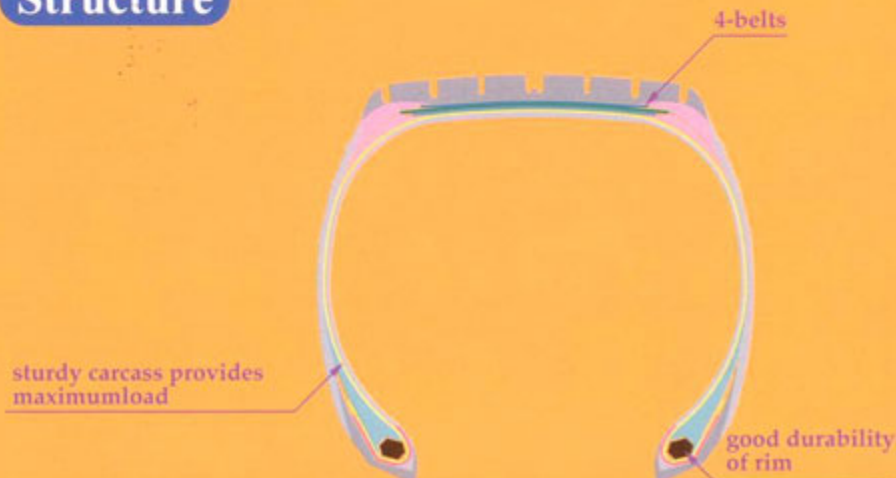

- Shoulder defense groove, protects against severe shoulder wear, or irregular tread wear, associated with trailer fitments.
- Stone ejector system reduces stone retention.
- Greatly increases tread life and improves retreadability.
- Designed with tread depth of 14/32" reduces tread squirm and irregular wear patterns often associated with free rolling axles.