


S637

750 R16



Size	Load Range/ply	Load Index	Tread Depth		Max Speed (mile/h)	Speed Rate	Static Loadload Radius		Overall Diameter		Overall Width		Meas RIM	Min dual Spacing		Single Max i.p.		Dual Max i.p.		Max load (single/dual)		Revs Per Mile
			X/32	mm			ins.	mm	ins.	mm	ins.	mm		ins.	mm	psi	kpa	psi	kpa	lbs	kg	
215/75R17.5	16PR/H	135/133	16	13	75	L	14.23	361	30.39	772	8.07	205	6.00	9.33	237	125	860	125	860	4805/4540	2180/2060	683
235/75R17.5	16PR/H	143/141	17	13.5	75	L	14.73	374	31.57	802	8.90	226	6.75	10.31	262	125	860	125	860	6005/5675	2725/2575	658
225/70R19.5	14PR/G	128/126	16	13	75	L	14.91	379	32.01	813	8.62	219	6.75	10.00	254	110	760	110	760	3970/3750	1800/1700	649
245/70R19.5	14PR/G	136/134	17	13.5	75	L	15.35	390	33.07	840	9.57	243	7.50	10.98	279	120	825	120	825	4940/4675	2240/2120	628
265/70R19.5	14PR/G	140/138	17	14	75	L	15.82	402	34.21	869	10.16	258	7.50	11.61	295	112	775	112	775	5510/5205	2500/2360	607
255/70R22.5	16PR/H	140/137	17	14	75	L	17.12	435	36.73	933	9.65	245	7.50	11.30	287	120	830	120	830	5510/5070	2500/2300	565
275/70R22.5	16PR/H	148/145	19	15	80	M	17.61	447	37.91	963	10.71	272	8.25	12.24	311	130	900	130	900	6940/6395	3150/2900	548

Structure

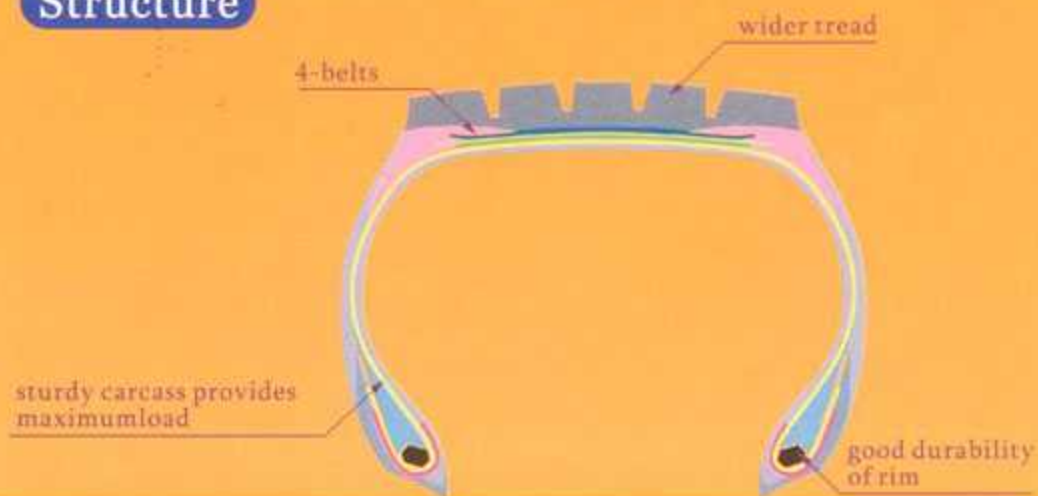

- Regional all position rib tire for both steer and trailer application.
- Wide tread surface ensures greater stability and handling.
- Designed with a lower rolling resistance providing better fuel efficiency.